



RETUNING YOUR SONIC RECEIVER




STEP 1
Using the Remote Control press "Menu" button. Main Menu screen appears with "Installation" highlighted

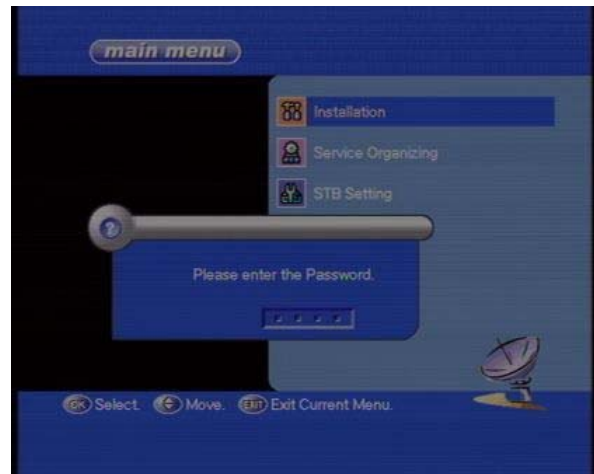

STEP 2
Click OK when "Installation" is highlighted and password window appears. Enter the digits "9949" using the Remote Control "0000"

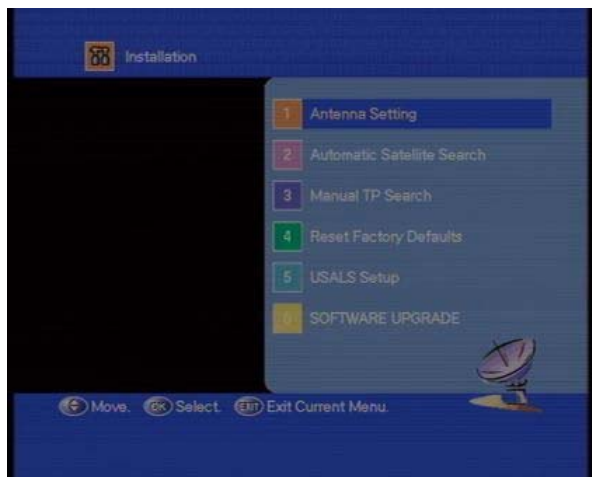

STEP 3
Installation Menu appears

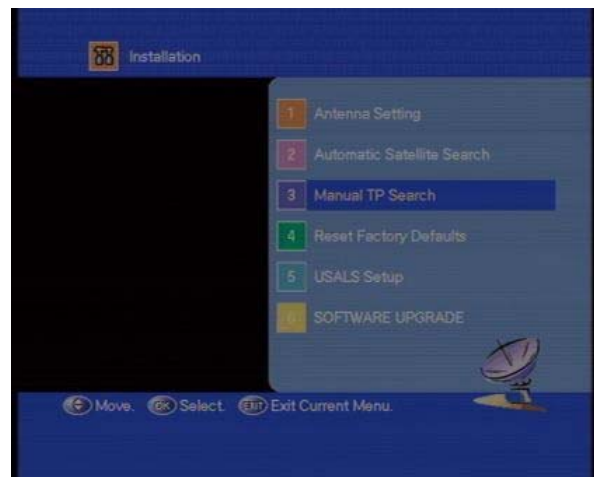

STEP 4
Using down key on Remote Control scroll down and highlight "Manual TP Search" / "Scan Transponder"



STEP 5
"Manual TP Search" Menu appears. Ignore the Dish name. Using down key scroll down to "Frequency"



STEP 6
Using Remote Control – enter the numbers "1 2 7 0 7"



STEP 7
Using down key scroll down to "Polarity". Change it to "Vertical" using either the left or right keys on the Remote Control



STEP 8
Scroll down to "Symbol Rate" and enter the digits " 2 2 5 0 0 "



STEP 9
Next scroll down to "Code Rate" and change it to "3 / 4" using left or right keys on Remote Control
"Network Search" change to "Enable"
Press "OK" on the remote control to start scanning



STEP 10
The screen will show the "Scanning" Menu and channel names will appear



STEP 11
Window will appear asking you to save.
Press "OK" on the Remote Control when "Yes" option is highlighted. Then press "Exit" button 3 times or until picture appears.



STEP 12
Scroll to your favourite channel